




# MH Eco 3


high efficiency gas heater with atmospheric burner



## TYPICAL APPLICATION:

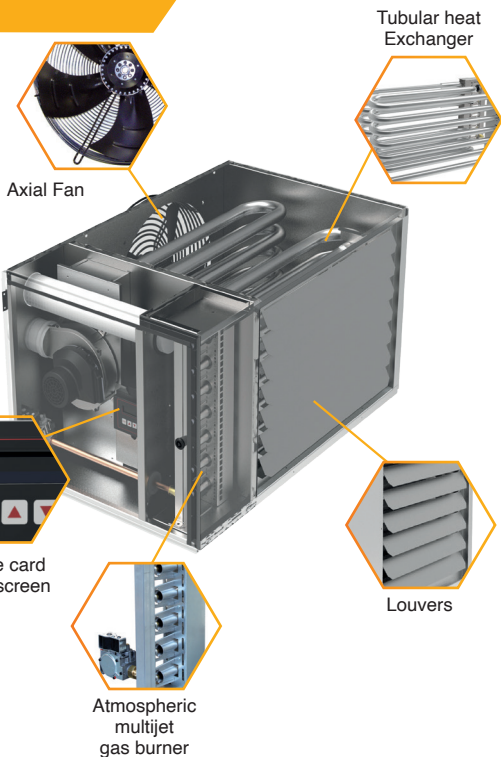

## ADVANTAGES


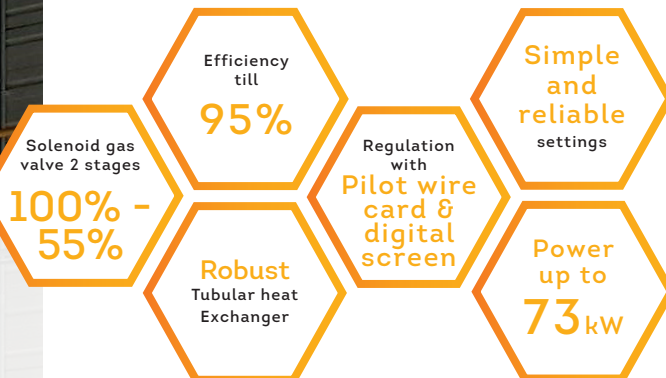


## OPTIONS & ACCESORIES

- > Centrifugal or Vertical configuration
- > Mounting brackets
- > Gas kits

Models	Units	MH25 Eco 3	MH35 Eco 3	MH45 Eco 3	MH60Eco 3	MH80 Eco 3
Heat input LCV	kW	26	36	46	61	80
Nominal output	kW	24	34	43	56	73
Thermal efficiency	%	92				
Minimal output	kW	14	19	24	32	42
Thermal efficiency	%	95				
Air flow rate at 15°C	m3/h	3 580	4 250	5 800	7 700	10 000

Seasonal efficiency above 78% - NOx lower than 70 mg/kWh



White epoxy coating

Models	Units	MH25 Eco 3	MH35 Eco 3	MH45 Eco 3	MH60 Eco 3	MH80 Eco 3
Width (A)	mm	1 060				
Depth (B)*	mm	800		875		
Height (C)	mm	495	545	600	710	912
Gas	mm	3/4"				
Fumes Outlet	mm	80				100
Air Inlet	mm	80				100
Weight	kg	82	95	108	132	152

\*: From the front to back side of gas heater (including fan)

## FLUE CONNECTION



## REGULATION

We offer a wide choice of control solutions specifically adapted to our range of gas unit heaters. Our range is the only one to meet the «pilot wire» requirement equipping our gas unit heaters. Our offer meets the simplest as well as the most advanced needs.



In an ongoing effort to improve its products, Solaronics reserves the right to change prices and specifications without notice.

DC-MH-2109-EN